

'C' Range

The Selwood C150 chopper pump is the ideal solution for pumping solids, sludge and rags.

Building upon Selwood's market leading reputation, the Selwood C150 chopper pump has been developed with our key partners in the process, industrial and water sectors. All have a common requirement to pump and condition liquids that contain a high proportion of solids, organic matter or rags.

The Selwood C150 chopper pump, with its hardened impeller and cutter (60 rockwell) plus a cutting action giving 3000 cuts per minute, is more than capable of meeting these arduous applications.

The C150 automatic self-priming diesel has the choice of either a skid mount or mobile site chassis for on-site flexibility. It also comes with **Selprime** as standard.


Super Silent option available.

'C' Range - Chopper Pump



'C' Range - Chopper Pump

C150

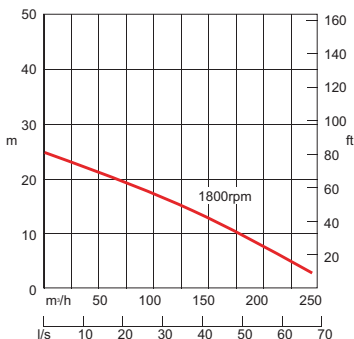


Model	C150	
Capacity	m ³ /h	240
Total Head	m	24.5
Solids Size	mm	38
Self Priming Lift	m	8.8
Air Handling	l/s	24
Pump Speed Max.	rpm	1800
Inlet / Outlet	mm	150
Prime Mover	Diesel	
Dimensions (LxWxH)	cm	Site 261 x 122 x 144
		Skid 175 x 100 x 129
		Super Silent 215 x 155 x 182
Dry Weight	kg	Site 790
		Skid 760
		Super Silent 1800
Super Silent Model	db(A) @ 7m	58

Note: Specification shown for current model. Older versions may vary.

Note: Picture may not correspond to the current configuration.

C150 - Electric

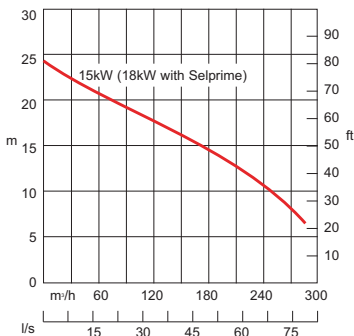

Model		C150 - Electric	
Capacity	m ³ /h	285	
Total Head	m	24	
Solids Size	mm	38	
Self Priming Lift	m	8.8	
Air Handling	l/s	24 (Selprime only)	
Pump Speed Max.	rpm	1470	
Inlet / Outlet	mm	150 / 100	
Prime Mover		Electric (15 or 18kW)	
Dimensions (LxWxH)	cm	Electric	155 x 49 x 60
		Selprime	180 x 57 x 94
Dry Weight	kg	Electric	400
		Selprime	550

Pumps equipped with Selprime require more power to operate.

Note: Specification shown for current model. Older versions may vary.

Note: Picture may not correspond to the current configuration.

T: 03330 142000