

'PD' Range

The Selwood PD Spate pumps are ideal for handling dirty water, slurries, light and heavy oils, petroleum industry products, including some of the more viscous liquids, at a high, non turbulent flow rate.

The unique design makes them the perfect pumps for the control of oil pollution. It is world renowned for its suitability on all oil recovery applications and works in conjunction with a wide variety of recovery systems and skimmers.

Simplicity of design and construction provides for total ease of maintenance.




'PD' Range - Positive Displacement Pumps



'PD' Range - Positive Displacement Pumps


PD75

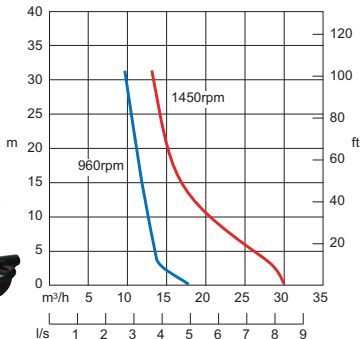

Model		PD75
Capacity	m ³ /h	30
Total Head	m	30.5
Solids Size	mm	6
Self Priming Lift	m	8.8
Air Handling	l/s	3.77
Pump Speed Max.	rpm	1450
Inlet / Outlet	mm	75
Prime Movers		Petrol
Dimensions (LxWxH)	mm	2 Wheel Site - 1000 x 640 x 690
Dry Weight	kg	2 Wheel Site - 95

'PD' Range - Positive Displacement Pumps

PD100

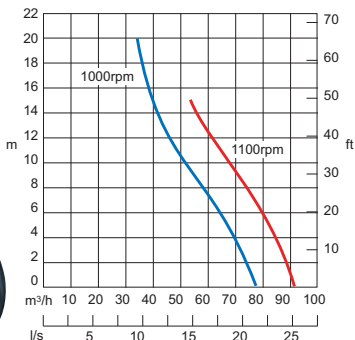

Model	PD100	
Capacity	m ³ /h	77
Total Head	m	20
Solids Size	mm	16
Self Priming Lift	m	8.8
Air Handling	l/s	11.8
Pump Speed Max.	rpm	1000
Inlet / Outlet	mm	100
Prime Movers		Diesel
Dimensions (LxWxH)	mm	4 Wheel Site - 2240 x 1110 x 1230 Skid - 2020 x 1000 x 1480
Dry Weight	kg	4 Wheel Site - 525 Skid - 670